



DOCUMENT OF COMPLIANCE

Special Requirements for Ships Carrying Dangerous Goods

Issued in pursuance of the requirement of regulation II-2/19.4 of the International Convention for Safety of Life at Sea, 1974, as amended, under the authority of the Government of
the Republic of Singapore
by **CHINA CLASSIFICATION SOCIETY**

Name of ship	<u>WAN HAI 711</u>
Distinctive number or letters	<u>9VCZ7</u>
Port of registry	<u>Singapore</u>
Ship type	<u>Container Ship</u>
IMO No.	<u>9965320</u>

THIS IS TO CERTIFY:

1. that the construction and equipment of the above mentioned ship was found to comply with the provisions of regulation II-2/19 of the International Convention for the Safety of Life at Sea, 1974, as amended; and
2. that the ship is suitable for the carriage of those classes of dangerous goods as specified in the appendix hereto, subject to any provisions in the International Maritime Dangerous Goods (IMDG) Code and the International Maritime Solid Bulk Cargoes Code (IMSBC Code) for individual substances, materials or articles also being complied with.

This document is valid until February 8, 2031

Completion date of the survey on which this document is based: February 9, 2026

Survey conducted by **Jiang Jianxie**.

Issued at Shanghai

Issued on February 9, 2026



(Liang Haipeng)

CHINA CLASSIFICATION SOCIETY

NOTE:

1. Ships constructed on or after 1 July 2002 have to comply with SOLAS reg. II-2/19 and all the requirements introduced with 2000 SOLAS amendments.
2. There are no special requirements in the above-mentioned regulation II-2/19 for the carriage of dangerous goods of classes 6.2 and 7, and for the carriage of dangerous goods in limited quantities, as required in chapter 3.4 of the IMDG Code, and excepted quantities, as required in chapter 3.5 of the IMDG Code.
3. Solid bulk cargo shall not be carried unless it is listed in the cargo list of Certificate of Compliance Required by IMSBC Code.



APPENDIX
SPACES TO BE INDICATED IN THE PLANS NEXT PAGE WITH NUMBERS
CORRESPONDING WITH THE TABLE BELOW


Loading Area Class	In cargo hold No.1- No.5	In cargo hold No.6	In cargo hold No.7	On upper deck except above ER	On top of ER	
1.1-1.6	—	—	—	P*2) *3)	—	
1.4S	P*1)	P	—	P*2)	P	
2.1	P*1)	—	—	P*2)	—	
2.2	P*1)	P	—	P*2)	—	
2.3 flammable	—	—	—	P*2)	—	
2.3 non-flammable	—	—	—	P*2)	—	
3 liquids FP<23°C	P*1)	—	—	P*2)	—	
3 liquids 23°C≤FP≤60°C	P*1)	P	—	P*2)	—	
4.1	P*1)	P	—	P*2)	—	
4.2	P*1)	P	—	P*2)	—	
4.3 liquids	P*1)*5)	—	—	P*2)	—	
4.3 solids	P*1)	P	—	P*2)	—	
5.1	P*1)	P	—	P*2)	P *4)	
5.2	—	—	—	P*2)	—	
6.1 liquids FP>60°C	P*1)	—	—	P*2)	P	
6.1 liquids FP<23°C	P*1)	—	—	P*2)	—	
6.1 liquids 23°C≤FP≤60°C	P*1)	—	—	P*2)	—	
6.1 solids	P*1)	P	—	P*2)	P	
8 liquids	P*1)	—	—	P*2)	P	
8 liquids FP<23°C	P*1)	—	—	P*2)	—	
8 liquids 23°C≤FP≤60°C	P*1)	—	—	P*2)	—	
8 solids	P*1)	P	—	P*2)	P	
9	P*1)*6)	P*6)	—	P*2)	P*6)	

P : Indicates PACKAGED GOODS ALLOWED
 A : Indicates PACKAGED AND BULK GOODS ALLOWED
 B : Indicates BULK GOODS ALLOWED
 — : NOT ALLOWED




PLANS:

UNDER-DECK SPACES

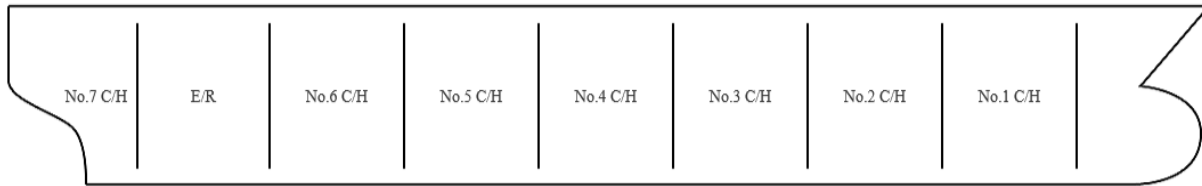

ON DECK SPACES

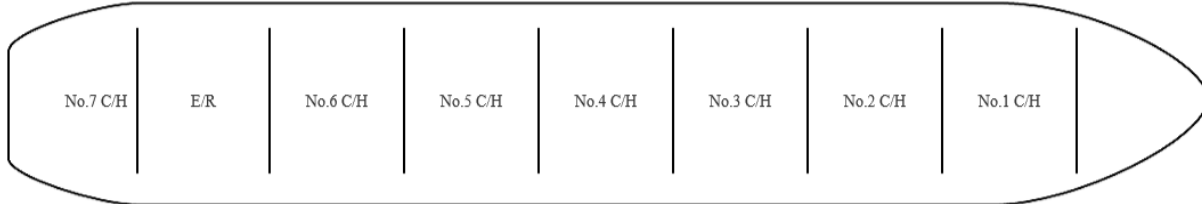

Remarks related to the information in previous table:

- *1) Except goods with explosion proof grade higher than IIB-T4.**
- *2) Reefer containers on weather deck to be stowed 3m away from the mechanical ventilation outlet and panel joints of dangerous cargo hold where dangerous cargo is loaded.**
- *3) Dangerous goods of class 1.1 to 1.6 shall be stowed 3 m horizontally away from the machinery space boundaries in all cases and not to be stowed within a horizontal distance of 6 m from potential sources of ignition in all case.**
- *4) Except goods stowage away from sources of heat.**
- *5) Except liquids F.P. < 23°C.**
- *6) Excluding goods evolving flammable.**

